

STANDARD BARRIER B3

STANDARD BARRIER

SPECIALLY DESIGNED TO PROTECT AREAS EXPOSED TO HIGH ENERGY SHOCK. THE ABSORPTION ZONE OF THE STANDARD BARRIER IS THE HIGHEST IN ENNAT'S RANGE OF BARRIERS, AS IT IS INTENDED TO ABSORB AND DIVERT FORKLIFT IMPACTS.

APLICACIONES

RACK HEADS, HIGH TRAFFIC CORRIDORS, OFFICES, AUTOMATION SYSTEMS, ELECTRICAL PANELS, ETC.

IMPACT ABSORPTION

ENERGY ABSORPTION THANKS TO THE MATERIAL'S ACTIVE MEMORY



4,0Ton





5,3 Mph

IMPACT OVER THE RUBBER PROTECTED BASE



ROTATION


FUNCTIONALITY TO REDIRECT THE FORKLIFT FORWARD DIRECTION

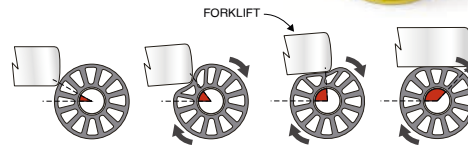

PATENT PENDING




SOL N°CL201903518 - 02/12/2019

DIMENSIONS (mm)

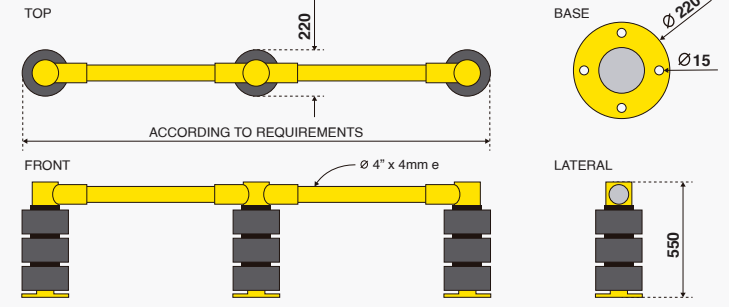

TECHNICAL INFORMATION

Effective Protection Height	Up to 55cm
Length	According to Requirement
T° Range	-20°C a 70°C
Surface Finish	Yellow Electrostatic Paint
Anchor Type	1/2" x 4 1/4" Anchor Bolt (4 units per base)
Materiality	ASTM A36 Steel / NR Rubber

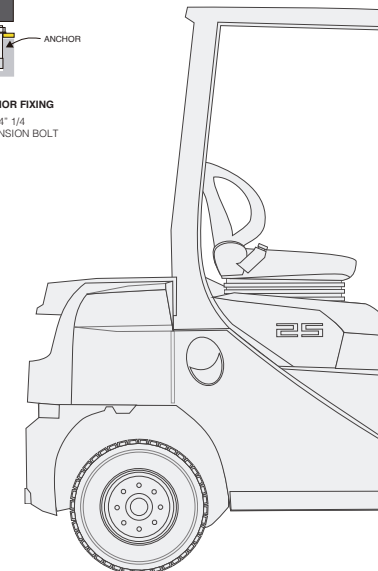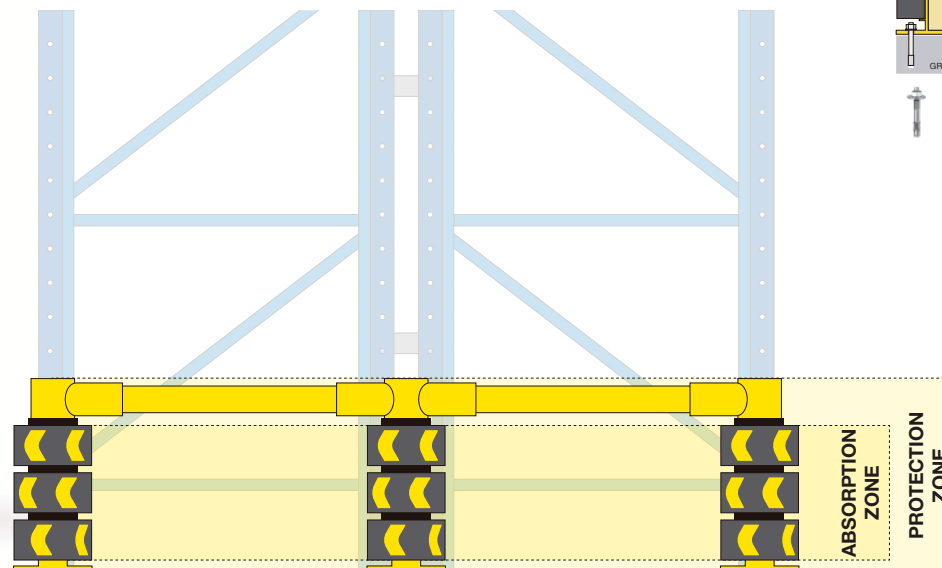

* LENGTHS AND CONFIGURATION ACCORDING TO SPECIFIC REQUIREMENTS

