

DOCK PROTECTOR PA200

DOCK PROTECTOR

ENNAT'S DOCK PROTECTOR IS DESIGNED TO PROTECT LOADING AND UNLOADING PLATFORMS. ITS PATENTED DESIGN OF CONTROLLED DEFORMATION AND ITS DIMENSIONS OF 15 3/4" HIGH X 8" WIDE, MAKE IT ABLE TO ABSORB THE IMPACTS OF TRAILERS AND TRUCKS WHEN THEY ARE PARKED ON THE PLATFORMS, KEEPING THE PLATFORMS FREE FROM DAMAGE AND PROTECTING, AT THE SAME TIME, THE MACHINERY.

APPLICATIONS

PROTECTION OF PLATFORMS AND DOCKS.

APLICACIONES

TECHNICAL INFORMATION

Effective protection Area	15 3/4" x 8"
Temp Range	-20°C a 70°C
Surface finishing	Black Matte with yellow stripes
Anchoring	1/2" x 4 1/4" Anchor Bolt
Materiality	NR Rubber with metallic insert



INDUSTRIAL PROTECTION

SOL N°CL201902483 - 28/08/2019


IMPACT ABSORPTION

ENERGY ABSORPTION THANKS TO THE ACTIVE MEMORY OF THE MATERIAL.

THE INTERIOR CAVITY OF THE PROTECTOR ALLOWS THE MATERIAL TO DEFORM AND CONVERT THE KINETIC ENERGY INTO POTENTIAL ENERGY STORED IN THE MATERIAL, WHICH IS THEN RESTITUTED, "PUSHING BACK" THE LOAD.



DIMENSIONS (mm)

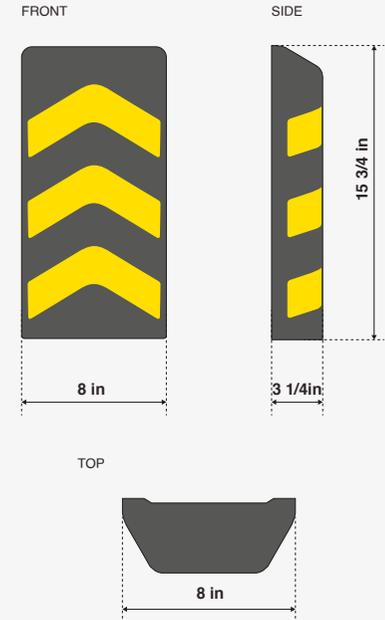

ANCHORING

